



Slab-on-grade for detached garages

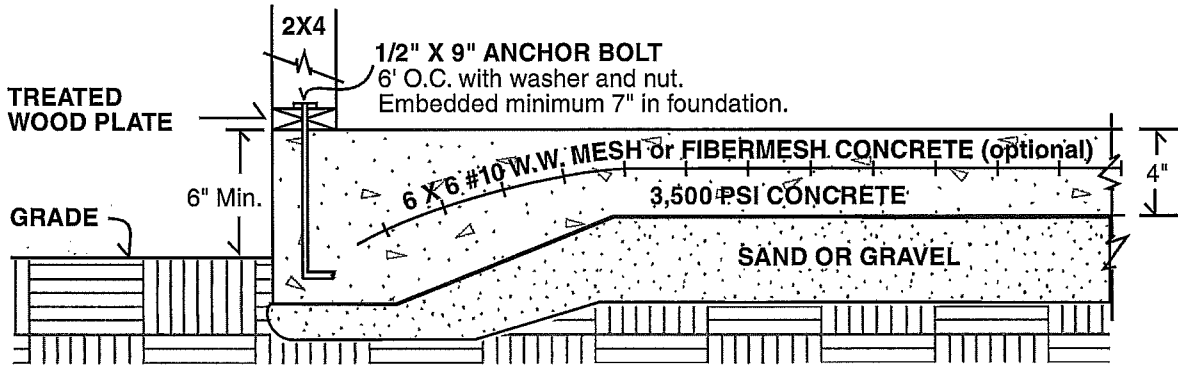

Poured concrete footing and foundation wall


Typical for attached garage

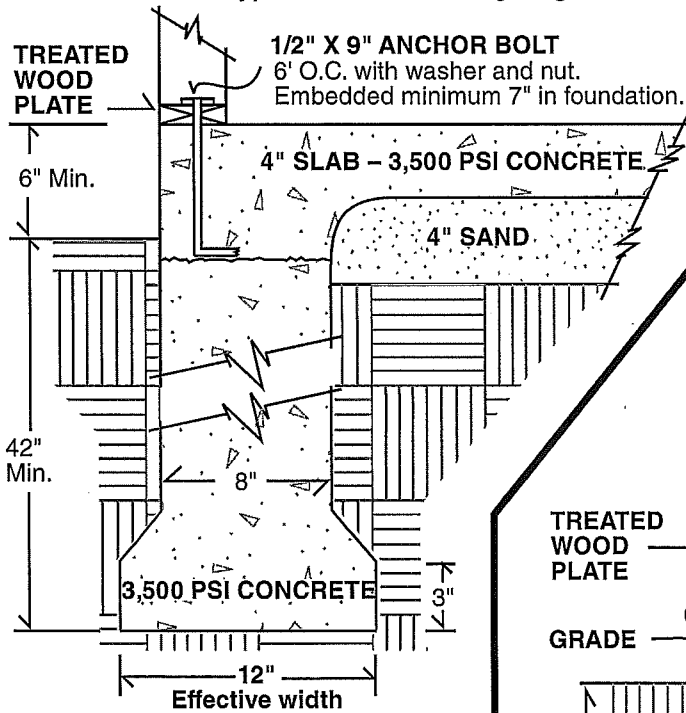

Note: Anchor bolts are a maximum of 6' O.C., 12" within any end or splice and minimum two per board.

Concrete block foundation wall on concrete footing

Typical for attached garage

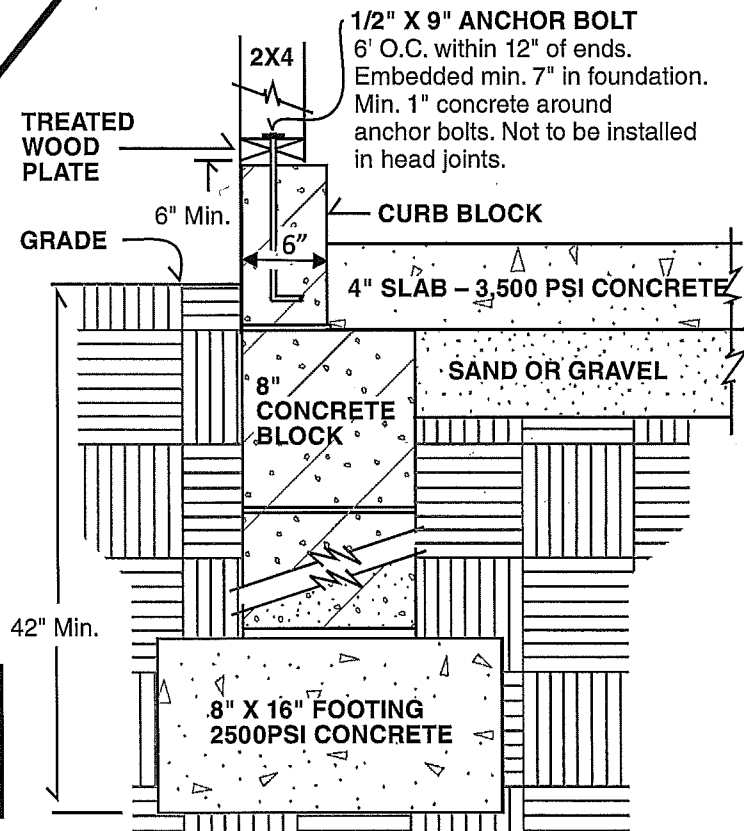

This is a guide to the most common questions and problems. It is not intended nor shall it be considered a complete set of requirements.